

QUIKFLEX™ 300



The QuikFlex™ 300 system for fully-enclosed packaging is an ideal cost-effective solution with a small footprint for moderate speed requirements, new product introductions, or trial market applications.

Machinery Highlights

No Tool Changeover


Our tool-less changeover technology is quick, simple and repeatable; eliminating time-consuming fine tuning. GPI's IQ Tablet with Changeover Checklist and Video Help enable proven changeover times of 15-30 minutes depending on the change required.

Functional Design, Easy Access Construction

- Heavy-duty tubular steel frame with corrosion resistant coatings and materials.
- Full height, clear visibility and sliding guard doors provide easy walk-in access to the machine.

More Production, Less Maintenance

Our design means less parts, fewer adjustments, simpler timing, fewer drive points, fewer chains, improved accessibility and better carton control from the feeder to the discharge.

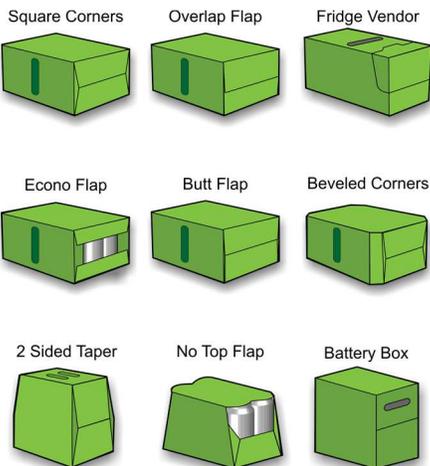

Machine Features (Standard)

- Small footprint
- GPI IQ Tablet - technical & parts manuals, 3D part viewer & changeover checklist
- Runs multi-diameter/height products
- 4-packs to 12-packs in most containers
- No-tool, quick and repeatable changeovers
- Right or left hand carton loading and controls
- Walk-in frame
- Text fault display
- 1.6 meter carton magazine
- Ergonomic waist-high carton loading
- Market proven segment wheel feeder
- High volume air assist carton opening
- Wedge metering for smooth product infeed
- Powered overhead
- Carton Follower

Machine Features (Optional)


- Change parts for additional product and or package formats
- Custom skirting
- Infeed mirror
- Internal lighting
- Tankless hot melt glue system
- Integrated turner divider (with or without reject)

Value Added Products and Services:

Tite-Pak: Carton handling system for integrated glass-bottle separation and protection.

Predictive Maintenance Program (PMP) Let GPI manage your machine maintenance with our market-proven PMP program.

Machine Footprint

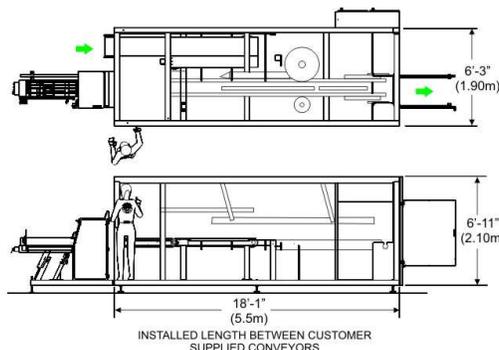


Specifications

Speed

Bottles or Can operation at speeds up to:
Pitch Line Surge
10" 75ppm 90ppm
(ppm = packs per minute)

Package Configuration

4,6,8,9 & 12 packs
Range dependent on primary container diameters.

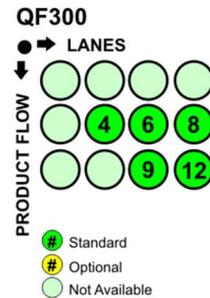

Primary Container Size Ranges

Diameter: 2.1" (53mm) to 3" (76mm)
Height: 3.5" (89mm) to 11" (279 mm)

Machine Dimensions

18' - 1" long, 6' - 3" wide, 6' - 11" high
(5.5m x 1.9m x 2.3m)

Machine Weight

Approx. 12,000lbs (5,443 kg)

Electrical

Machine: 460 VAC/60 Hz/30A
Gluer: 30A

Air Requirements

65 PSI-18CFM
(4.5 Bar-30.6 m³/h)

Lubrication

Automatic oiler
Manual grease

Hot Melt

To customer specification